

# Pit Grip ( Anti-skid floormat by all fabric materials )

## NEW TECHNOLOGY: ultra light weight, anti-skid, recyclable

### Features

- ① Ultra lightweight (low fuel consumption/Easy to use)
- ② Anti-skid (improved safety)
- ③ Sound absorbent (comfortable)
- ④ No VOC (no harmful materials)
- ⑤ Recyclable (environmentally friendly)

### Application

- ① Floormat
- ② Mat for nursing care
- ③ Dascon mat

### How to test

【Retention capability test / forward and backward】


<How to measure>

By performance testing method of automobile manufacturing company

【Retension capability test / rotative direction】

<How to measure>

By performance testing method of automobile manufacturing company

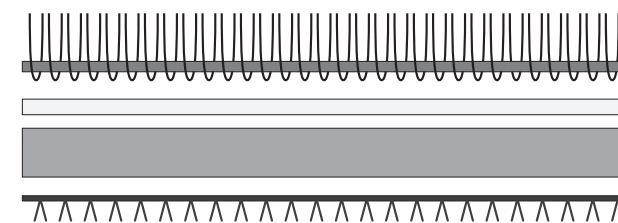

- Aeration property and greater sound absorbency can be achieved when compared to conventional rubber products due to the use of non-woven fabric.
- Being slippery only with non-woven fabric, we made a unified non-woven fabric with our **W Raschel** woven net, which ensures high retention effect.
- Use of the hot-melt adhesive, which is free from VOC, is environmentally friendly and leads to a lightweight product.


| Description  |                       | Specification           |
|--------------|-----------------------|-------------------------|
| Carpet layer | Pile thread           | Polypropylene/Polyester |
|              | Primary Ground fabric | Polyester               |
|              | Latex                 | SBR                     |

| Description |         | Specification |
|-------------|---------|---------------|
| Adhesive    | Hotmelt | Olefinic      |

| Description |                  | Specification |
|-------------|------------------|---------------|
| Pit Grip    | Non-woven fabric | Polyester     |
|             | W Raschel        | Polyester     |
|             | Woven Net        | Polyester     |

### Test data

- Competitor's rubber products
- Competitor's non-woven fabric products
- Pit Grip

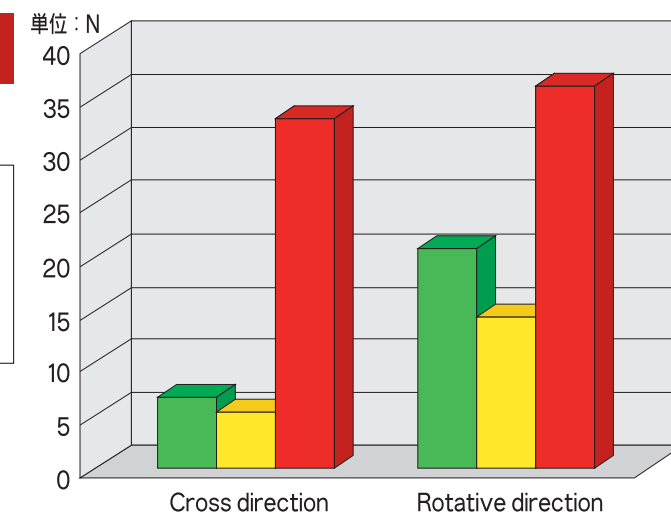

**FUKUI FIBERTECH CO., LTD**

5-1 IWANISHI, NAKAHARA-CHO, TOYOHASHI, AICHI, JAPAN TEL 81-50-7529-2085 / 81-532-41-1211 FAX 81-532-41-5078  
Contact person : Mark Inaoka E-mail : fukui-fibertech@global-c.biz <http://www.fukui-fibertech.co.jp>